

THERMADATA® WIFI LOGGERS FOR TEMPERATURE

- Email alerts user when alarm limits are exceeded
- Access temperature data worldwide via internet
- NO ongoing or subscription charges
- Programmable high/low alarm

The ThermaData WiFi loggers utilise the latest WiFi wireless technology. The loggers are a battery powered, cost-effective, temperature monitoring system that remotely records the temperature of appliances and buildings. Each logger transmits the recorded data to a WiFi router connected to the internet which can be accessed and viewed from a PC, laptop or tablet anywhere in the world.

The loggers have a range limited to the specification of the users WiFi router. Each logger has an intuitive LCD displaying; temperature, WiFi and internet connection status, max/min recorded temperatures, alarm status and battery life.




At programmable intervals, the loggers will record temperature from both sensors, recording up to a maximum of 18000 readings (9000 from each sensor). Each logger incorporates a red and green LED. The flashing green LED indicates that the logger is active/logging and the flashing red LED indicates that the customised preset alarms have been exceeded. Each logger communicates directly to the WiFi router at set intervals to push data through the internet into ThermaData Studio. The information is available to be analysed and exported into a report format. Each unit is supplied with a USB lead and FREE wall bracket ThermaData Studio software is available to download FREE from our website and is licence free, no ongoing or subscription charges.

HOW DOES THE THERMADATA WIFI LOGGER WORK?

Using the unique ID of each logger ThermaData Studio creates a secure connection between logger and software, which can be accessed and viewed anytime and anywhere with an internet connection. Each logger communicates directly to the WiFi router at set intervals to push data through the internet into ThermaData Studio. The information is available to be analysed and exported into a report format.



Simple setup & easy to use software makes the ThermaData WiFi loggers perfect for HACCP analysis

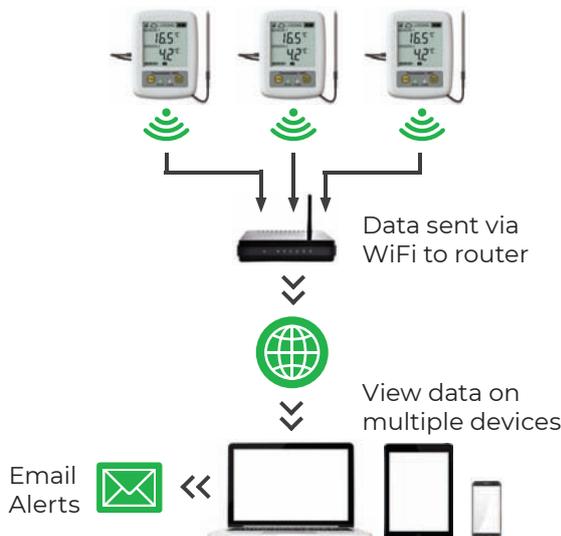

THERMADATA STUDIO SOFTWARE

Both powerful and sophisticated, yet user-friendly, the ThermaData Studio software enables temperature data to be organised and analysed to provide management information.

The ThermaData Studio software has the ability to display up to 32 traces on a graph, the trace colours are user selectable. All files can be viewed as thumbnail icons for easy identification.

The software allows the user to programme the logging sample/interval rate (0.1 to 330 minutes), communication interval (sync) with PC, real-time clock, °C or °F and a manual start option. It is also possible to include a user ID for each logger.

Please note: WiFi routers have a range of 100 metres depending on the make, model, capabilities and setup of the router. Environmental conditions may also affect the signal strength.

THERMADATA® WIFI ONE/TWO CHANNEL THERMISTOR LOGGERS

The ThermaData® WiFi thermistor loggers can be supplied with one internal sensor or a stainless steel general purpose probe (Ø3.3 x 100 mm) with a one metre PUR/PVC fixed lead. **Please Note:** Model TD1F is supplied with one external remote probe and an internal sensor. Model TD2F is supplied with two external remote probes.

Specification	TD	TD1F	TD2F
Range - internal	0 to 50 °C	0 to 50 °C	N/A
Range - external	N/A	-40 to 125 °C	-40 to 125 °C
Resolution	0.1 °C/°F		
Accuracy	±0.5 °C		
Memory	18000 readings	2 x 9000 readings	
Sample rate	0.1 to 330 minutes		
Battery & life	2 x 1.5 volt AA - approximately 1 year		
Display	12 mm LCD/2 LED's		
Dimensions	29 x 72.5 x 96 mm		
Weight	165 grams model dependant		
FREE traceable certificate of calibration included			



Order code	Description
298-001	Model TD
298-011	Model TD1F*
298-111	Model TD2F*
830-880	Protective boot - black
*Inclusive of thermistor probe(s)	

THERMADATA® WIFI TWO CHANNEL THERMOCOUPLE LOGGERS

The ThermaData® WiFi thermocouple loggers are available in two sensor types, type K and type T thermocouple. **Please Note:** Each logger is supplied exclusive of probes, see below for a small selection of probes available or for alternative designs see pages 75 to 81.

Specification	ThermaData WiFi - Thermocouple
Range - type K	-100 to 1372 °C
Range - type T	-100 to 400 °C
Resolution	0.1 °C/°F to 999.9 thereafter 1 °C/°F
Accuracy	±0.4 °C ±0.1 % of reading
Memory	2 x 9000 readings
Sample rate	0.1 to 330 minutes
Battery & life	2 x 1.5 volt AA - approximately 1 year
Display	12 mm LCD/2 LED's
Dimensions	29 x 72.5 x 96 mm
Weight	165 grams
FREE traceable certificate of calibration included	



General purpose probes (133-158)



Order code	Description
298-121	Model TD2TC - type K
298-721	Model TD2TC - type T
830-800	Magnetic mount
830-880	Protective boot - black
Exclusive of thermocouple probes	

		Order code
GENERAL PURPOSE PROBE  HIGH ACCURACY HIGH ACCURACY Ø3.3 x 100 mm	This stainless steel probe is suitable for a wide range of applications. Supplied with a one metre PTFE insulated lead and connector. <ul style="list-style-type: none"> Response time less than 5 seconds Probe temperature range -75 to 250 °C 	133-158
FOOD SIMULANT PROBE  HIGH ACCURACY HIGH ACCURACY 9 x 100 x 100 mm	This polypropylene simulant probe is designed for use in refrigeration, food storage and chill cabinets. Supplied with a one metre PTFE insulated lead and connector. <ul style="list-style-type: none"> Probe temperature range -20 to 100 °C 	133-350
HEAVY DUTY PTFE WIRE PROBE  HIGH ACCURACY HIGH ACCURACY Ø2.4 x 1000 or 2000 mm	This heavy duty, PTFE insulated wire probe is ideal for measuring the air temperature in fridges, freezers, ovens etc. <ul style="list-style-type: none"> Response time less than 1 second Probe temperature range 75 to 250 °C 	133-372 (1000 mm) 133-373 (2000 mm)

Please note: for type T thermocouple probes, replace the third digit (3) of the order code with the number 7